## This Page Is Inserted by IFW Operations and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

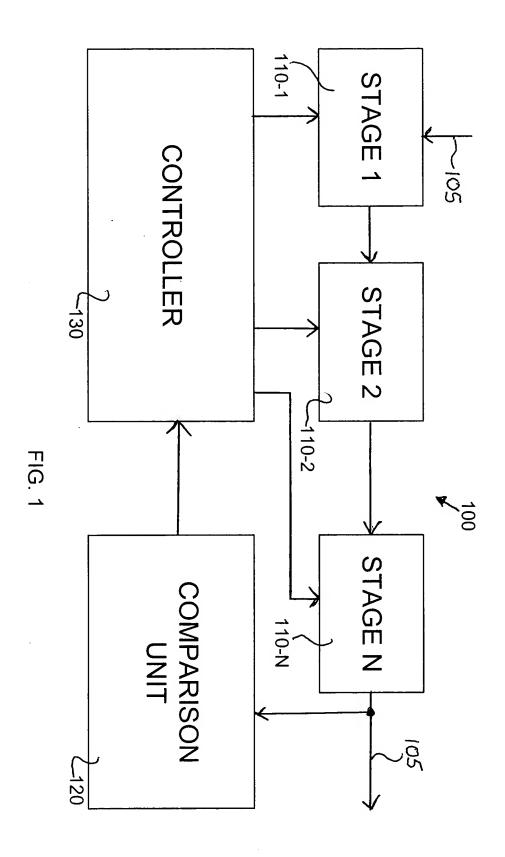




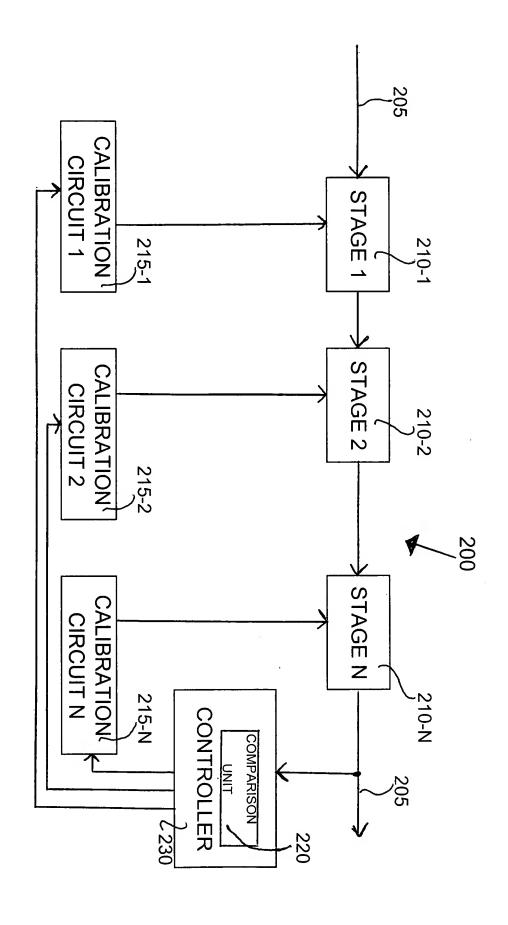


FIG. 2

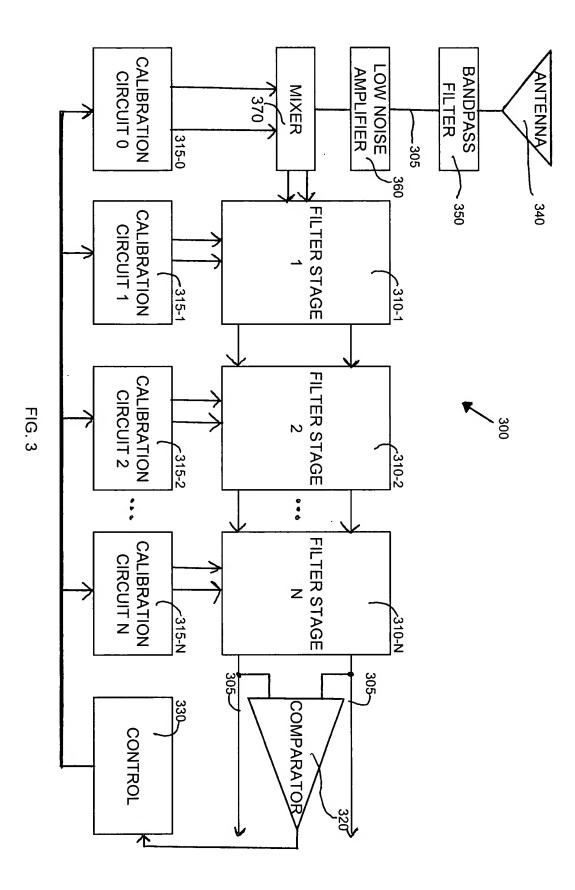

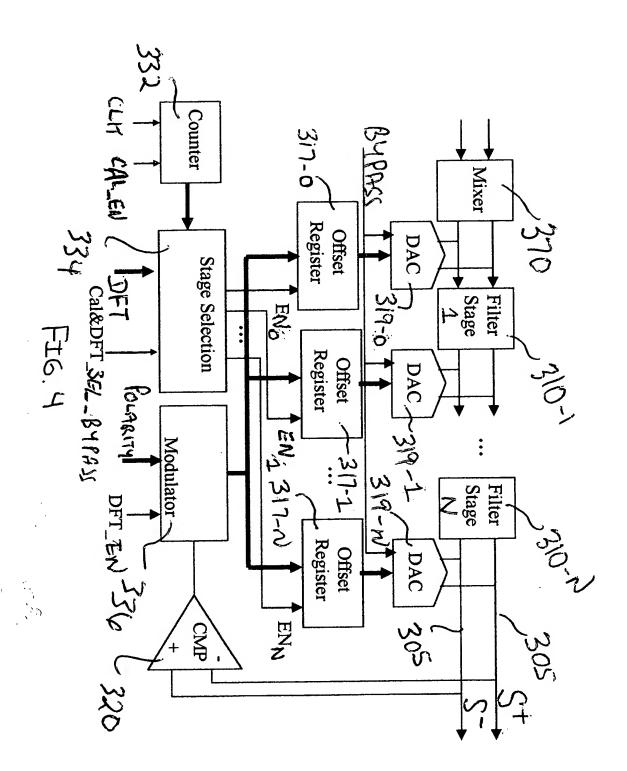

direct pro-

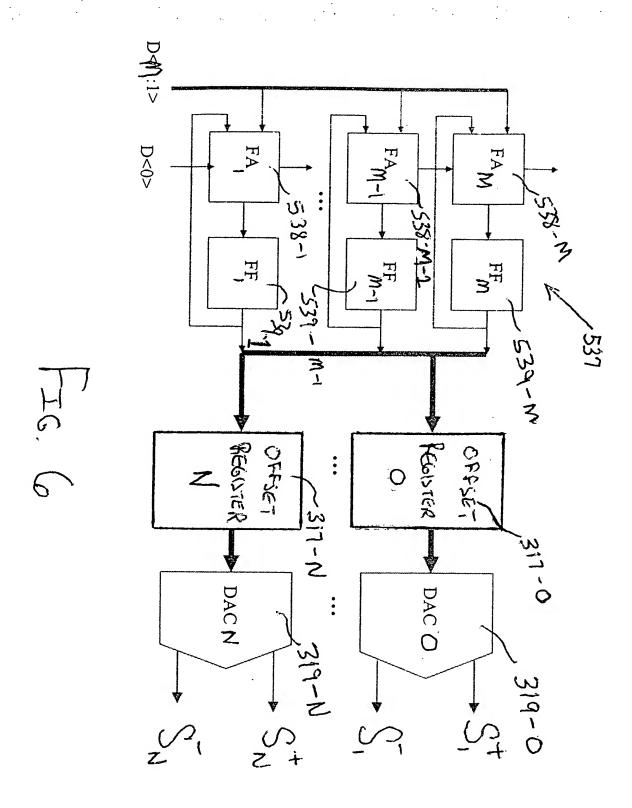

N. S 639 637

EVALUATE A RECEIVED SIGNAL FROM AN OUTPUT OF A FINAL STAGE OF MULTIPLE STAGES IN A RECEIVER CHANNEL USING A SINGLE COMPARISON UNIT.

- 810

SELECTIVELY CONTROL THE
CALIBRATION OF EACH STAGE
OF THE MULTIPLE STAGES
BASED ON AN OUTPUT FROM
THE SINGLE COMPARISON UNIT.

-820

FIG. 8

